















# INDOOR

## index


















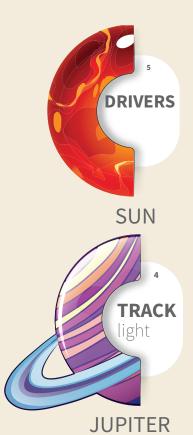











#### **COB** Light



Code	Wattage ( w )	Lumen (lm)	Dimensions ( dia )	Cut-out ( mm )	Beam Angle (°)	IP rating	Case Lot (No's)
1007	7W	>560	70 X 50	60	42	20	20
1012	12W	>960	85 X 65	75	42	20	20
1018	18W	>1440	95 X 75	85	42	20	20









Code	Wattage ( w )	Lumen (lm)	Dimensions ( dia )	Cut-out ( mm )	Beam Angle (°)	IP rating	Case Lot (No's)			
1107	7W	>560	70 X 50	60	42	20	20			
1112	12W	>960	85 X 65	75	42	20	20			
1118	18W	>1440	95 X 75	85	42	20	20			
*Reflectors	*Reflectors - A, B, C, D A-silver, B-white, C-black, D-rose gold ( ) ( )									



Code	Wattage ( w )	Lumen (lm)	Dimensions ( dia )	Cut-out ( mm )	Beam Angle (°)	IP rating	Case Lot (No's)
2012	12W	>1080	86 X 42	75	24	20	20

\*Reflectors - White & Black ( )







Code	Wattage ( w )	Lumen (lm)	Dimensions ( dia )	Cut-out ( mm )	Beam Angle (°)	IP rating	Case Lot (No's)
2112	12W	>600	86 X 42	75	90	20	20

\*Reflectors - White & Black \*LED Model - SMD










#### **COB** Surface Light

Code	Wattage ( w )	Lumen (lm)	Dimensions ( dia )	Beam Angle (°)	IP rating	Case Lot (No's)
1607	7W	>560	62 X 70	42	20	20
1612	12W	>960	76 X 85	42	20	20
1618	18W	>1440	86 X 100	42	20	20
*Reflectors -	A, B, C, D A-silver, B-white,	C-black, D-rose gold	<ul><li></li></ul>			



Code	Wattage ( w )	Lumen (lm)	Dimensions ( dia )	Beam Angle (°)	IP rating	Case Lot (No's)
1707	7W	>560	62 X 70	42	20	20
1712	12W	>960	76 X 85	42	20	20
1718	18W	>1440	86 X 100	42	20	20
*Reflectors -	A, B, C, D A-silver, B-white,	C-black, D-rose gold	• <b>6</b>			



#### **DOME** Light

Code	Wattage ( w )	Lumen (lm)	Dimensions ( dia )	Beam Angle (°)	IP rating	Case Lot (No's)
515	15W	>900	172 X 32	120	20	20

<sup>\*</sup>Mounting :- Surface mount








### EDGE DOWN Light round die cast

Code	Wattage ( w )	Lumen (lm)	Dimensions ( dia )	Cut-out ( mm )	Beam Angle (°)	IP rating	Case Lot (No's)
408	8W	>400	120 X 20	108	120	20	20
415	15W	>900	172 X 20	158	120	20	20
422	22W	>1650	225 X 20	208	120	20	20
*Material :-	Aluminium						

#### **DOWN** Light round PC

Code	Wattage ( w )	Lumen (lm)	Dimensions ( dia )	Cut-out ( mm )	Beam Angle (°)	IP rating	Case Lot (No's)
3003	3W	>150	82 X 23	66	120	20	20
3006	6W	>360	118 X 23	102	120	20	20
3012	12W	>840	168 X 24	151	120	20	20
3015	15W	>1050	168 X 24	151	120	20	20
3018	18W	>1260	220 X 24	198	120	20	20





 Code	Wattage (w)	Lumen (lm)	Dimensions ( mm )	Cut-out ( mm )	Beam Angle (°)	IP rating	Case Lot (No's)
3103	3W	>150	82 X 82 X 23	66 X 66	120	20	20
3106	6W	>360	118 X 118 X 23	102 X 102	120	20	20
3112	12W	>840	168 X 168 X 24	151 X 151	120	20	20
3115	15W	>1050	168 X 168 X 24	151 X 151	120	20	20
3118	18W	>1260 2	220 X 220 X 24	198 X 198	120	20	20







#### **DOWN** Light round PC DOB

Code	Wattage ( w )	Lumen (lm)	Dimensions ( dia )	Cut-out ( mm )	Beam Angle (°)	IP rating	Case Lot (No's)
3207	7W	>420	95 X 35	70	120	20	20
3215	15W	>900	130 X 35	106	120	20	20
3225	25W	>1500	160 X 30	140	120	20	20

#### **TRACK** Light



Code	Wattage ( w )	Lumen (lm)	Dimensions ( mm )	Mounting	Beam Angle (°)	IP rating	Case Lot (No's)
9010	10W	>900	125 X 50 X 172	Track mount	36	20	20
9020	20W	>1800	145 X 60 X 200	Track mount	36	20	20
9030	30W	>2700	180 X 80 X 210	Track mount	36	20	20

<sup>\*</sup>Body colour :- White & Black







#### **PROFILE** Light

Code	Dimension ( mm )	Cut-out ( mm )	Mounting	Beam Angle (°)	IP rating
PR1707	23 X 7	17	Recessed	120	20
PS1707	17 X 7	-	surface	120	20

#### **STRIP** Light



Code	Voltage (v)	Colour	Length (mtr)	LED/mtr	IP rating	
SLE122835240/W	DC 12/24	White	5	240	20	
SLE122835240/WW	DC 12/24	Warm White	5	240	20	

#### **Drivers**



Code	Wattage ( W ) / Voltage (v)	IP rating
5A	60W / 12V DC	20
10A	120W / 12V DC	20
16.6A	200W / 12V DC	20

#### **ROPE** Light



Code	Length ( mtr/roll )	Wattage ( w/mtr )	Voltage ( v AC )	Dimensions ( mm )	IP rating
SLI13WW	50Mtr/1 Roll	6W/1Mtr	230V	12 x 7	65





### **DECORATIVE** Light



Code	Wattage ( w )	Colour	Case Lot (No's)
LB2RGB	2W	RGB	100



Code	Wattage ( w )	Colour	Case Lot (No's)
LB2BL	2W	Blue	100
LB2GR	2W	Green	100
LB2RD	2W	Red	100
LB2YL	2W	Yellow	100
LB2PR	2W	Purple	100
LB2OR	2W	Orange	100
LB2PK	2W	Pink	100



Length (mtr)	

LBBCPB

10







### **FLOOD** Light

Code	Wattage ( w )	Lumen (lm)	Dimensions ( mm )	Beam Angle (°)	IP rating	Case Lot (No's)
7050	50W	>5000	215 X 200 X 50	120	65	12
70100	100W	>10000	263 X 237 X 53	120	65	10
70150	150W	>15000	292 X 275 X 60	120	65	8
70200	200W	>20000	323 X 323 X 55	120	65	6

<sup>\*</sup>Mounting :- pole, wall & surface mount

#### FLOOD Light DOB



Code	Wattage ( w )	Lumen (lm)	Dimensions ( mm )	Beam Angle (°)	IP rating	Case Lot (No's)
8050	50W	>5000	207 X 162 X 25	80	65	12
80100	100W	>10000	272 X 214 X 25	80	65	10
80150	150W	>15000	332 X 252 X 25	80	65	8
80200	200W	>20000	380 X 282 X 25	80	65	6
80400	400W	>40000	472 X 362 X 25	80	65	1

<sup>\*</sup>Mounting :- pole, wall & surface mount







### **STREET** Light

Code	Wattage ( w )	Lumen (lm)	Dimensions ( mm )	Suitable pole diameter ( mm )	Mounting	Beam Angle (°)	IP rating	Case Lot (No's)
6024	24W	>2400	260 X 100 X 55	35-40	Pole mount	Batwing	65	20
6036	36W	>3600	300 X 120 X 50	40-45	Pole mount	Batwing	65	20
60150	150W	>15000	565 X 205 X 75	60-65	Pole mount	Batwing	65	6



#### **STREET** Light

Code	Wattage ( w )	Lumen (lm)	Dimensions ( mm )	Suitable pole diameter ( mm )	Mounting	Beam Angle (°)	IP rating	Case Lot (No's)
6550	50W	>5500	400 X 140 X 50	40-45	Pole mount	Batwing	65	10
6570	70W	>7700	400 X 140 X 50	40-45	Pole mount	Batwing	65	10
65100	100W	>11000	400 X 140 X 50	40-45	Pole mount	Batwing	65	10

#### HIRAKI LED Pvt.Ltd

Plot No. F2, F3, FICII FL0,TSIIC, Sultanpur Ameenpur Mandal, Patancheru. Hyderabad-502319, Telangana, India.

Toll free Number :- 1800 599 1383





Email:care@hirakiled.com



040-29310060